



BP 441 Yaoundé – Tél.: 22-22-22-46-01
P.O BOX Fax : 22-22-22-57-55

AVIS D'APPEL D'OFFRES NATIONAL OUVERT

N° 06 /AONO/CNPS/DG/CIPM-BEC/22 DU 31 MAI 2022

RELATIF AUX TRAVAUX DE REMPLACEMENT GENERAL DE LA TOITURE DU BATIMENT PRINCIPAL, DE REFECTION DE L'ETANCHEITE DE LA TOITURE TERRASSE DU BATIMENT ANNEXE, DE CONSTRUCTION D'UNE FOSSE SEPTIQUE ET DE REHABILITATION DES TOILETTES ANCIEN PRESTIGE AFRIQUE DE L'IMMEUBLE EX-SIA A DOUALA

FINANCEMENT : Budget Programme de la CNPS 2018-2022

1. Objet de l'Appel d'Offres

Le présent Appel d'Offres National Ouvert a pour objet les travaux de remplacement général de la toiture du bâtiment principal, de réfection de l'étanchéité de la toiture terrasse du bâtiment annexe, de construction d'une fosse septique et de réhabilitation des toilettes Ancien Prestige Afrique de l'immeuble EX-SIA à Douala.

2. Consistance des travaux

Les travaux objet de la présente consultation portent essentiellement sur :

1 - Opérations préalables

Installation de chantier (20% du prix), baraque et panneau de chantier (30% du prix), mobilisation du personnel (10% du prix), planning et plans d'exécution et de recollement (10% du prix), amené (20% du prix) et repli (10% du prix) du matériel

Location échafaudage métallique pour travaux en hauteur

2 - Toiture bâtiment principal

Dépose complète des tôles usées et éléments bois défectueux de la charpente (pannes, chevrons, lattes, bastaings etc), y compris toutes sujétions

Fourniture et pose Bastaings de section 0,03x 0,12 longues de 5m assemblés pour renforcement des fermes en bois dur du pays préalablement traité à l'IMPREBOIS ou équivalent

Fourniture et pose Chevrons de section 0,08x0,08 longs de 5m pour renforcement des fermes en bois dur du pays préalablement traité à l'IMPREBOIS ou équivalent

F/P Lattes en bilinga de section 0,04x 0,08 longues de 5m préalablement traité à l'IMPREBOIS ou équivalent

Renforcement solivage faux plafond en bois dur du pays préalablement traité à l'IMPREBOIS ou équivalent

Remplacement partiel des contreplaqués défectueux du faux-plafond y compris toutes sujétions

Fourniture et pose Tôle bac prélaquée 6/10 pour toiture, accessoires de fixation et toutes sujétions d'étanchéité comprises

Fourniture et pose Tôle bac prélaquée 6/10e pour Auvent balcon arrière de l'entrée principale, accessoires de fixation, remplacement bois pourri y compris étanchéité

Fourniture et pose Tôle lisse pour plafonds extérieurs y compris solivage lattes de section 0,04x0,08, longues de 5m en bois dur du pays préalablement traité (voir model du batiment annexe)

Fourniture et pose bandes ourlées y compris toutes sujétions

3 - Toiture-terrasse batiment annexe

Préparation des surfaces par décapage partiel à chaud du complexe étanche existant y compris Paxalu

Révision partielle des formes de pente en béton dosé à 250 kg/m³
 Fourniture et application du flinkote sur surfaces révisées y compris toutes sujétions
 Fourniture et application bicouche de bitume sur toute la surface considérée y compris toutes sujétions
 Fourniture et pose feutre bitumineux type Irène sur toute la surface considérée y compris toutes sujétions
 Fourniture et pose Paxalu sur chéneau en béton et autres installations
 Fourniture et pose grille anti-vol métallique de 2,62x2,62m sur fenetre donnant à la toiture terrasse bâtiment annexe

4 - Construction d'une fosse septique et puisard

Fouilles en puits pour fosse septique de dimensions 3,00x2,00x2,70m
 Fouilles en puits pour puisard de diamètre 1,20m, de profondeur 8m
 Remblai de la fosse septique et du puisard
 Béton de propreté dosé 150Kg/m³ au fond des fouilles
 Béton armé dosé à 350 kg/M³ (HA8) pour poteaux, chainages
 Béton armé dosé à 350 kg/M³ (HA10) pour dalle plateforme fosses septiques et puisard y compris toutes sujétions de couvercles
 Agglomérés de 15x20x40 bourrés pour fosses septiques
 Agglomérés de 15x20x40 bourrés pour puisard (hauteur: 0,8m)
 Dallage dosé à 250Kg/m³ du sol
 Enduit étanche au mortier de ciment + sikalite
 Lissage du dallage et des murs
 Regard 0,80x0,80x0,50 avec couvercle en béton armé, lissage du fond, parois et autres sujétions comprises
 F/P Tuyauterie PVC normalisé Ø 125 Ep-03 mm, conduite EU-EV y compris toutes sujétions de raccordement
 F/P Tuyauterie PVC normalisé Ø 100 conduite des ventilations y compris toutes sujétions
 F/P des raccords PVC (Té, coude, chapeau de ventilation) colliers avec joint Ø 100 ; grillage avertisseur
 Nettoyage du site et évacuation des terres à la décharge publique y compris toutes sujétions

5 - Travaux d'aménagement d'un bloc toilettes

Peinture

Préparation des surfaces par grattage, ponçage y compris toutes sujétions de colmatage des fissures au panticoat
 Fourniture et application peinture de type pantex 800 sur murs
 Fourniture et application peinture de type pantex 800 sous plafond
 Fourniture et application peinture de type glycérophthalique sur cadres et portes y compris toutes sujétions de ponçage

Menuiseries

Réfection plafond toilette homme y compris toutes sujétions
 Fourniture et pose serrures de porte type vachette (suivant modèle en place) y compris toutes sujétions
 Raccords au droit du cadre de la porte principale
 Remplacement porte alu vitrée de l'entrée de 1,9x2,10 m, ferme-porte et toutes sujétions comprises
 Réfection des gardes-corps alu des escaliers du 1er étage, visage, renforcement et changement des éléments défectueux

Electricité


Fourniture et pose hublot étanche rond 100w-220v (**Legrand/schneider**)
 Fourniture et pose interrupteur double allumage 10A-220v (**Legrand/chneider**)
 Fourniture et pose interrupteur simple allumage encastré 10A-220v (**Legrand/chneider**)
 Fourniture et pose lampes linolites 220
 Fourniture et pose applique de douche étanche 220v (**Legrand/chneider**)
 Fourniture et pose ampoule économique 18w (**Phillips**)
 Fourniture et pose coffret module 01 apparent 10A-220V (**legrand/chneider**)
 Fourniture et pose disjoncteur 10A (**Legrand/chneider**)
 Fourniture et pose barette de domino 16A-220A
 Fourniture et pose câble VGV 3X2.5 d'alimentation au compteur

Plomberie

Fourniture et pose W.C sorties arrières prêts à poser (tous les accessoires).
 Fourniture et pose Tuyaux alu blancs de Ø 20 rouleau de 50 mètres

AD

Fourniture et pose Tuyaux alu rouge de Ø 16
Fourniture et pose Tés à compression de Ø 20
Fourniture et pose Tés à compression de Ø 16
Fourniture et pose Coudes à compression de Ø 20
Fourniture et pose Coudes à compression de Ø 16
Fourniture et pose Paquet de 50 Colliers Atlas de Ø 20 + Pattes
Fourniture et pose Paquet de 50 Colliers clics blancs plastiques de Ø 16 + Pattes
Fourniture et pose Paquet de 100 Chevilles Plastiques de Ø 8
Fourniture et pose Vanne d'arrêt à boisseau de Ø 20
Fourniture et pose Vannes à papillons à compression de 16
Fourniture et pose Embouts à compression de Ø 16 M
Fourniture et pose Embouts à compression de Ø 16 F
Fourniture et pose Embouts à compression de Ø 16 x 16
Fourniture et pose Manchons laiton de Ø 15/21
Fourniture et pose Mamelons laiton de Ø 15/21
Fourniture et pose Téflons industriels
Fourniture et pose Manchons réduits à compression de Ø 20 x 16
Fourniture et pose Robinets mono de lavabo
Fourniture et pose Vidages de lavabo automatiques
Fourniture et pose Bidon de 05 litres d'acide Chloridrique
Fourniture et pose Bouchons laiton femelles de Ø 15/21
Fourniture et pose Tubes de silicone transparente
Fourniture et pose Kg de ciment colle blanc
Fourniture et pose Kg de ciment blanc
Fourniture et pose Portes savons
Fourniture et pose Porte serviettes
Fourniture et pose Portes Papier hygiéniques
Fourniture et pose Té pression de Ø 21/25
Fourniture et pose Embout pression Ø 25 x 32 x 1/2
Fourniture et pose Tube de colle GEBSOPLAST ou équivalent
6 - Nettoyage général du site
Nettoyage et évacuation des décombres, déchets et autres saletés à la décharge publique

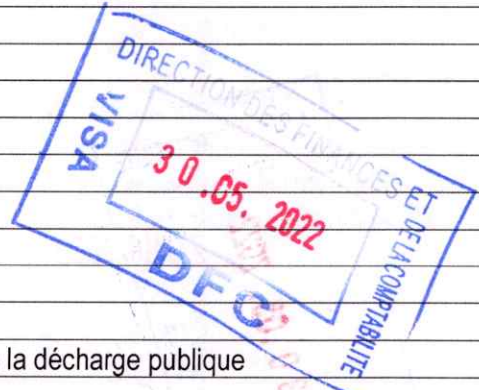

Autres : Production des plans de recollement, nettoyage du site et transport des déchets à la décharge publique, réception des travaux.

3. Délai et lieu d'exécution

Le délai d'exécution prévu par le Maître d'Ouvrage pour la réalisation des travaux objet du présent Appel d'Offres est de **cinq (05)** mois.

Les travaux seront exécutés à Douala.

4. Coût prévisionnel

Le coût prévisionnel de l'opération à l'issue des études préalables est de **50 742 185 (cinquante millions sept cent quarante-deux mille cent quatre-vingt-cinq) FCFA** HTT.

5. Participation et origine

La participation au présent Appel d'Offres est ouverte aux entreprises de Bâtiments et Travaux Publics de droit commun camerounais, ayant une expérience avérée dans le domaine de la réalisation des travaux de génie civil.

6. Financement

Les travaux objet du présent Appel d'Offres sont financés par le Budget Programme 2018-2022 de la Caisse

Nationale de Prévoyance Sociale sur la ligne d'imputation budgétaire **6-2D2206** conformément au programme **P106**.

7. Cautionnement provisoire

Chaque soumissionnaire doit joindre à ses pièces administratives, une caution de soumission établie par une banque de premier ordre agréée par le Ministère en charge des Finances précisant le montant de **1 014 000 (un million quatorze mille)**.

En cas de groupement, seul le mandataire se doit de produire la caution. Ladite caution sera valable pendant trente (30) jours au-delà de la date originale de validité des offres.

8. Consultation du Dossier d'Appel d'Offres

Le dossier peut être consulté sur le site internet de la CNPS (www.cnps.cm) ou sollicité via l'adresse email : servicedesmarches@cnps.cm.

9. Acquisition du Dossier d'Appel d'Offres

Le dossier peut être obtenu au Service des Marchés, 9^{ème} étage, porte 903 de l'immeuble-siège de la CNPS dès publication du présent avis, contre présentation d'une quittance de versement d'une somme non remboursable de francs CFA **65 000 (soixante-cinq mille)**, dans le Compte Spécial CNPS n° 1003 3052 0707 0070 00003-93 ouvert dans les livres de la banque UBA.

Lors du retrait du dossier, les soumissionnaires devront dans tous les cas se faire enregistrer en laissant leur adresse complète (boîte postale, téléphone).

Les soumissionnaires peuvent scanner et transmettre les reçus de paiement puis retirer le DAO via l'adresse e-mail : servicedesmarches@cnps.cm.

10. Remise des offres

Le délai accordé aux soumissionnaires pour la remise des offres est de vingt un (21) jours pour les DAO.

Chaque offre rédigée en français ou en anglais en six (06) exemplaires dont un (01) original et cinq (05) copies marqués comme tels, devra parvenir au Service des Marchés, 9^{ème} étage porte 903 de l'immeuble-siège de la CNPS au plus tard le 22 JUN 2022 à **14 heures**, heure locale et devra porter la mention :

« APPEL D'OFFRES NATIONAL OUVERT
N° 06 /AONO/CNPS/DG/CIPM-BEC/22 DU 31 MAI 2022

RELATIF AUX TRAVAUX DE REMPLACEMENT GENERAL DE LA TOITURE DU BATIMENT PRINCIPAL, DE REFECTION DE L'ETANCHEITE DE LA TOITURE TERRASSE DU BATIMENT ANNEXE, DE CONSTRUCTION D'UNE FOSSE SEPTIQUE ET DE REHABILITATION DES TOILETTES ANCIEN PRESTIGE AFRIQUE DE L'IMMEUBLE EX-SIA A DOUALA

A N'OUVRIR QU'EN SEANCE DE DEPOUILLEMENT »

11. Recevabilité des offres

Sous peine de rejet, les pièces du dossier administratif requises doivent être produites en originaux ou en copies certifiées conformes par le service émetteur ou une autorité administrative, conformément aux stipulations du Règlement Particulier de l'Appel d'Offres.

Elles doivent dater de moins de trois (03) mois précédant la date originale de dépôt des offres ou avoir été établies postérieurement à la date de signature de l'Avis d'Appel d'Offres.

Toute offre incomplète ou mal présentée conformément aux prescriptions du Dossier d'Appel d'Offres sera déclarée irrecevable.

12. Ouverture des plis

L'ouverture des plis se fera en un temps.

L'ouverture des pièces administratives et des offres techniques et financières aura lieu le 22 JUN 2022 à **14**

heures 30 mn, heure locale, par la Commission Interne de Passation des Marchés chargée des Bâtiments et Equipements Collectifs de la Caisse Nationale de Prévoyance Sociale, dans la salle de réunions de ladite Commission au 4ème étage, porte 416, de l'immeuble CNPS sis à l'avenue Kennedy.

Seuls les soumissionnaires peuvent assister à cette séance d'ouverture ou s'y faire représenter par une personne de leur choix dûment mandatée.

13. Critères d'évaluation

➤ Critères éliminatoires

- Fausses déclarations, substitution ou falsification des pièces administratives ;
- Absence d'une pièce administrative à l'ouverture des plis ou non-conformité d'une pièce du dossier administratif (toutefois, le soumissionnaire dispose d'un délai de 48h pour rendre conforme, la pièce non conforme, faute de quoi il sera éliminé) ;
- N'avoir pas réalisé au cours des trois (03) dernières années, des travaux similaires de construction et/ou de réhabilitation d'un bâtiment d'un montant cumulé supérieur ou égal à FCFA 25 000 000 (vingt-cinq millions) ;
- Absence d'un prix unitaire conjointement dans le Devis Quantitatif et Estimatif et le Bordereau des Prix Unitaires ;
- N'avoir pas validé au moins 70% des critères d'évaluation ;
- Plus de deux (02) marchés en cours d'exécution avec la CNPS ;
- Absence de la déclaration de non abandon et de non défaillance dans l'exécution des marchés à la CNPS au cours des deux (02) dernières années, signée par le Maître d'Ouvrage ou son Représentant dûment mandaté;
- Retard non justifié avec dépassement de délai au cours de l'exécution d'un marché non encore réceptionné à la CNPS ;
- Non-respect des normes RSE :
 - Personnel affilié à la CNPS : supérieur ou égal à 5 (joindre liste détaillée du personnel assortie de leurs immatriculations individuelles à la CNPS, l'APS attestant de la régularité du paiement des cotisations et les télé déclarations des 03 derniers mois) ;
 - Juste rémunération (respect du SMIG, joindre DIPE ou état des salaires) ;
 - Respect du principe de la promotion du genre : au moins 20% de genre féminin dans l'effectif lorsque celui-ci est supérieur à cinq personnes (joindre la liste du personnel assortie du rapport genre) ;
 - Assurance de responsabilité civile couvrant l'exercice en cours (joindre police d'assurance).

N.B : En cas de groupement, chacune des entreprises devra respecter les normes RSE ci-dessus listées.

➤ Critères essentiels de qualification

N°	CRITERES	EVALUATION	
		OUI	NON
1	Présentation générale de l'offre <ul style="list-style-type: none"> • Reliure en spirale, mise en forme du document, ordonnancement des différentes parties du document et Intercalaires en couleur. 		
2	Capacité de financement <ul style="list-style-type: none"> • Justifier d'une capacité de financement au moins égale à FCFA 35 000 000 (trente-cinq millions) délivrée par une banque de premier ordre agréée par le Ministère en charge des Finances 		
3	Conformité aux normes HQSE <ul style="list-style-type: none"> • Justifier des équipements de protection individuelle des travailleurs 		
4	Qualification et expérience du personnel clé <ul style="list-style-type: none"> • Conducteur des travaux : <ul style="list-style-type: none"> - Technicien Supérieur de Génie Civil (Bacc+2 au moins) ; - Expérience professionnelle : au moins trois (03) années ; • Chef de Chantier : <ul style="list-style-type: none"> - Technicien de Génie Civil (Bacc au moins) ; - Expérience professionnelle : au moins deux (02) années 		

5	Connaissance du site des travaux : <ul style="list-style-type: none"> • Attestation de visite de site cosignée par le soumissionnaire et un responsable de la structure bénéficiaire ou son représentant. Dans tous les cas, le soumissionnaire est censé avoir parfaite connaissance du site des travaux. • Rapport de visite détaillant les caractéristiques du site, les difficultés rencontrées et les recommandations le cas échéant. 		
6	Les preuves d'acceptation des conditions du Marché : <ul style="list-style-type: none"> • CCAP paraphé sur chaque page, daté, signé et cacheté à la dernière page précédé de la mention « lu et approuvé » : • CCTP paraphé sur chaque page, daté, signé et cacheté à la dernière page précédé de la mention « lu et approuvé » : 		
7	Planning et Délai <ul style="list-style-type: none"> • Planning détaillé concernant l'exécution des travaux correspondant au délai ; • Délai ≤ cinq (05) mois 		
8	Méthodologie et organisation <ul style="list-style-type: none"> • Note méthodologique • Approche organisationnelle des équipes de travail. 		

14. Attribution

Le Marché sera attribué au candidat ayant :

- présenté l'offre administrative conforme ;
- validé au moins 70% des critères essentiels ;
- présenté l'offre financière évaluée la moins disante.

15. Durée de validité des offres

Les soumissionnaires restent engagés par leur offre pendant une période de quatre-vingt-dix (90) jours à partir de la date limite fixée pour la remise des offres.

16. Visite du site

Une visite guidée du site est prévue par le Maître d'Ouvrage, après la publication du présent Avis d'Appel d'Offres.

17. Renseignements complémentaires

Les renseignements complémentaires peuvent être adressés au Service des Marchés via l'adresse email : servicedesmarches@cnpes.cm.

Copies :

- PCA/CNPS ;
- DECT ;
- P/CIPM-BEC;
- DAG (SM)
- Affichage.



Yaoundé, le 31 MAI 2022

Noël Bénédict Mbeke
Moondé Akame





BP 441 Yaounde – Tel.: 22-22-22-46-01
P.O BOX Fax: 22-22-22-57-55

OPEN NATIONAL INVITATION TO TENDER

No. 06 /AONO/CNPS/DG/CIPM-BEC/22 OF 31 MAI 2022

RELATING TO THE GENERAL REPLACEMENT OF THE ROOF OF THE MAIN BUILDING, REPAIR OF THE WATERPROOFING OF THE FLAT ROOF AREA OF THE ANNEX BUILDING, CONSTRUCTION OF A SEPTIC TANK AND REHABILITATION OF THE OLD PRESTIGE AFRIQUE TOILETS OF THE EX-SIA BUILDING IN DOUALA

FUNDING: Programme Budget of the NSIF 2018-2022

1. Purpose of the Invitation to Tender

The purpose of this Open National Invitation to Tender is for the general replacement of the roof of the main building, repair of the waterproofing of the flat roof area of the annex building, construction of the septic tank and the rehabilitation of the former Prestige Afrique toilets of the EX-SIA building in Douala.

2. Consistency of Works


The works covered by this Invitation to Tender mainly concerns:

1 – Preliminary Operations
Site installation (20% of the price), site hut and panel (30% of the price), mobilisation of personnel (10% of the price), planning and execution and assembly plans (10% of the price), bringing in (20% of the price) and taking out (10% of the price) of equipment
Metal scaffolding rental for work at height
2 - Main building roof
Complete removal of worn sheets and defective wooden elements of the framework (purlins, rafters, battens, bastaings etc.), including all the necessary requirements
Supply and installation of Bastaings of section 0,03x 0,12 long of 5m assembled for reinforcement of the trusses in hard wood previously treated with IMPREBOIS or equivalent
Supply and installation of rafters of section 0,08x0,08 long of 5m for reinforcement of the trusses in hardwood of the country previously treated with IMPREBOIS or equivalent
F/P Bilinguala laths section 0,04x 0,08 long of 5m previously treated with IMPREBOIS or equivalent
Reinforcement of false ceiling joist in local hardwood previously treated with IMPREBOIS or equivalent
Partial replacement of the defective plywood of the false ceiling including all the necessary requirements
Supply and installation of pre-painted sheet metal 6/10 for roofing, including fixing accessories and all waterproofing requirements
Supply and installation of pre-painted sheet metal 6/10 for the rear balcony awning of the main entrance, fixing accessories, replacement of rotten wood including waterproofing
Supply and installation of smooth sheet metal for external ceilings including joisting of section 0.04x0.08, 5m long, in pre-treated local hardwood (see model of the annex building)
Supply and installation of hemmed strips including all the necessary requirements
3 - Roof top of annex building
Preparation of surfaces by partial hot stripping of the existing waterproof complex including Paxalu

Partial revision of the slope forms in concrete dosed at 250 kg/m ³
Supply and application of flinkote on the revised surfaces including all the necessary requirements
Supply and application of two layers of bitumen over the entire surface in question, including all the necessary requirements
Supply and installation of Irene type bituminous felt over the entire surface in question, including all the necessary requirements
Supply and installation of Paxalu on concrete gutter and other installations
Supply and installation of a 2.62x2.62m metal anti-burglary grille on the window leading to the roof terrace of the annex building
4 - Construction of a septic tank and sump
Excavation of a pit for a septic tank, size 3.00x2.00x2.70m
Excavation of a pit for a sump of 1.20m diameter and 8m depth
Backfill for septic tank and sump
Concrete of 150Kg/m ³ at the bottom of the excavation
Reinforced concrete dosed at 350 kg/M ³ (HA8) for posts, chaining
Reinforced concrete dosed at 350 kg/M ³ (HA10) for septic tank platform slab and sump including all cover requirements
15x20x40 block for septic tanks
15x20x40 blocks filled for cesspool (height: 0,8m)
Pavement dosed at 250Kg/m ³ of soil
Waterproofing with cement mortar + sikalite
Smoothing of the floor and walls
Manhole 0,80x0,80x0,50 with reinforced concrete cover, smoothing of the bottom, walls and including all other requirements
F/P Standard PVC pipework Ø 125 Ep-03 mm, EU-EV pipe including all connection requirements
F/P Standard PVC pipework Ø 100 mm, ventilation pipework including all the necessary requirements
F/P PVC fittings (tee, elbow, ventilation cap) collars with Ø 100 joint; warning grid
Cleaning of the site and evacuation of the soil to the public dumpsite including all the necessary requirements
5 - Refurbishment of a toilet block
Painting
Preparation of the surfaces by scraping, sanding, including all the necessary requirements for sealing cracks with panticoat
Supply and application of Pantex 800 type paint on walls
Supply and application of Pantex 800 type paint under the ceiling
Supply and application of glycerophtalic paint on frames and doors, including all sanding requirements
Carpentry
Repair of the ceiling of the men's toilet, including all the necessary requirements
Supply and installation of door locks type vachette (according to model in place) including all necessary requirements
Fittings at the right of the main door frame
Replacement of the aluminium glazed door of the entrance of 1,9x2,10 m, including door closer and all the necessary requirements
Repair of the aluminium railings of the stairs on the 1st floor, face, reinforcement and replacement of defective elements
Electricity
Supply and installation of a round watertight window 100w-220v (Legrand/schneider)
Supply and installation of double switch 10A-220v (Legrand/chneider)
Supply and installation of a single flush-mounted switch 10A-220v (Legrand/chneider)
Supply and installation of 220° linolite lamps
Supply and installation of 220v waterproof shower light (Legrand/chneider)
Supply and installation of 18w energy saving bulb (Phillips)
Supply and installation of apparent module 01 10A-220V (Legrand/Chneider)
Supply and installation of 10A circuit breaker (Legrand/chneider)
Supply and installation of domino strip 16A-220A
Supply and installation of VGV 3X2.5 power cable to the meter

Handwritten marks in blue ink on the left margin, including a stylized signature and some scribbles.

Plumbing
Supply and installation of rear outlets ready to install (all accessories).
Supply and installation of white aluminium pipes Ø 20, roll of 50 metres
Supply and installation of red aluminium pipes Ø 16
Supply and installation of Ø 20 mm compression tees
Supply and installation of Ø 16 mm compression tees
Supply and installation of Ø 20 compression elbows
Supply and installation of Compression elbows Ø 16
Supply and installation of Pack of 50 Atlas collars Ø 20 + feet
Supply and installation of Pack of 50 white plastic click clamps Ø 16 + feet
Supply and installation Pack of 100 Plastic plugs Ø 8
Supply and installation of Ø 20 mm ball shut-off valve
Supply and installation of 16" compression butterfly valves
Supply and installation of Compression fittings Ø 16 M
Supply and installation of Compression fittings Ø 16 F
Supply and installation of Compression fittings Ø 16 x 16
Supply and installation of Brass sleeves Ø 15/21
Supply and installation of Brass nipples Ø 15/21
Supply and installation of Industrial Teflons
Supply and installation of Compression sockets Ø 20 x 16
Supply and installation Single washbasin taps
Supply and installation Automatic washbasin drains
Supply and installation 05 litre can of Chloridric acid
Supply and fitting Female brass plugs Ø 15/21
Supply and installation of transparent silicone tubes
Supply and installation of Kg of white cement glue
Supply and installation of Kg of white cement
Supply and installation of soap holders
Supply and installation of towel racks
Supply and installation of toilet paper holders
Supply and installation of Ø 21/25 pressure tee
Supply and installation of Pressure nozzle Ø 25 x 32 x ½
Supply and installation of Glue tube GEBSOPLAST or equivalent
6 - General cleaning of the site
Cleaning up and removal of rubble, waste and other dirt at the public dumpsite

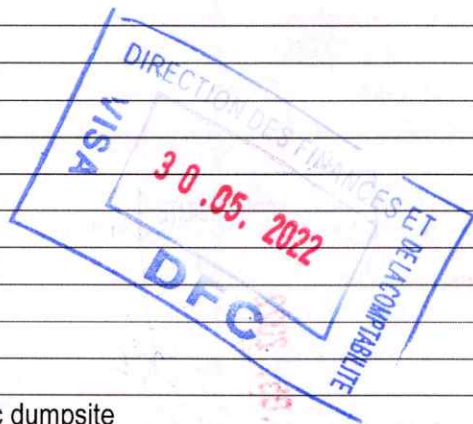

Other: Production of assembly plans, cleaning of the site and transport of the waste to the public dumpsite, acceptance of the work.

3. Deadline and Execution Site

The deadline set by the Project Owner for the realisation of services covered by this Invitation to Tender is **five (05)** months.

Execution site is Douala.

4. Estimated Cost

The estimated cost of the contract at the end of preliminary studies is **50 742 185 (fifty million seven hundred and forty-two thousand one hundred and eighty-five)** CFA F excluding taxes (HT).

5. Participation and Origin

Participation to this Invitation to Tender is open to building construction and public works companies, established under Cameroon law with proven experience in the Civil Engineering domain.

6. Funding

The work covered by this Invitation to Tender are financed from the programme budget 2018-2022 of the National Social Insurance Fund, on budget line No. **6-2D2206** in accordance with programme **P106**.

7. Provisional Guarantee

Each bidder shall attach to his administrative documents, a bid bond established by a first-class bank approved by the Ministry of Finance, specifying the sum of **1 014 000 (one million fourteen thousand) CFA F**.

In the case of a grouping, only the authorised representative must provide his or her deposit. The Bid shall be valid for thirty (30) days beyond the original date of validity of the offers.

8. Consultation of Tender File

The Tender file may be consulted on the web site of the NSIF (www.cnps.cm) or solicited via the email address: servicedesmarches@cnps.cm.

9. Acquisition of Tender File

The tender file may be obtained at the Contracts Unit located at the 9th floor, room 903 of the NSIF Head Office, Independence square, upon publication of this notice, against presentation of a payment receipt of a non-refundable sum of **65 000 (sixty-five thousand) CFA F**, into the NSIF Special Account opened at the UNITED BANK OF AFRICA (UBA) No. 1003 3052 0707 0070 00003-93.

At retrieval, bidders shall in any case register themselves by providing their complete addresses (post box, telephone).

Bidders can scan and submit payment receipts and then withdraw the Tender file via the e-mail address: servicedesmarches@cnps.cm

10. Submission of Bids

The deadline for the submission of bids of this tender file is twenty-one (21) days.

Each bid drafted in English or French, in six (06) copies, including one (01) original and five (05) copies labelled as such, should reach the Contracts Unit, 9th floor, room 903 of the Head Office of the NSIF no later than le 22 JUN 2022 at **2:00 pm**, local time and shall be labelled:

"OPEN NATIONAL INVITATION TO TENDER
No. 06 /AONO/CNPS/DG/CIPM-BEC/22 OF 13.1 MAI 2022

RELATING TO THE GENERAL REPLACEMENT OF THE ROOF OF THE MAIN BUILDING, REPAIR OF THE WATERPROOFING OF THE FLAT ROOF AREA OF THE ANNEX BUILDING, CONSTRUCTION OF A SEPTIC TANK AND REHABILITATION OF THE OLD PRESTIGE AFRIQUE TOILETS OF THE EX-SIA BUILDING IN DOUALA

TO BE OPENED DURING THE BIDS OPENING SESSION"

11. Admissibility of Offers

Subject to being rejected, the administrative documents required must be produced in originals or certified true copies by the issuing service or an administrative authority in accordance with the stipulation specified in the Invitation to Tender.

These documents must not be older than three (03) months preceding the original date of submission of bids or been established after the date of signature of the tender notice.

Any incomplete or poorly presented tender in accordance with the prescriptions of this Notice to Tender shall be declared inadmissible.

12. Opening of Bids

Bids shall be opened in one phase.

The opening of administrative documents and the technical and financial offers shall take place on

22 JUN 2022

at 2:30 pm, local time, by the Internal Commission of the Tenders Board responsible for Collective Buildings and Equipment of the National Social Insurance Fund, in the Boardroom of the Said Commission at the 4th floor, room 416, of the NSIF building at Avenue Kennedy.

Only bidders shall attend the bids opening session or be represented by a duly mandated person of their choice.

13. Evaluation Criteria

➤ Eliminary Criteria

- False statement, replacement or forged administrative document;
- Absence of an administrative document at the opening of bids or non-compliance of one of the administrative documents (however, the bidder has a deadline of 48 h, to produce a compliant document, otherwise he shall be eliminated);
- Not to have carried out, over the last three (03) years, similar works of building construction and/or rehabilitation works for a cumulative amount equal to or greater than 25 000 000 (twenty-five million) CFA F;
- Absence of a unit price in both the Quantities and Estimates and the Schedule of Unit Prices;
- Failing to validate at least 70% of the evaluation criteria;
- More than two (02) contracts in progress with the NSIF;
- Absence of a declaration of non-abandonment or non-failure in the execution of contracts prior to the NSIF, during the last two (02) years and signed by the Contracting Authority or his duly mandated representative
- An Unjustified delay with overrun of time during the execution of a Contract not yet received at the NSIF;
- Non-compliance with CSR standards:
 - Workforce affiliated at the NSIF: greater than or equal to 05 (attach a detailed list of personnel with their individual insured numbers with the NSIF, clearance certificate (APS) showing update of payment of contributions and online declaration of the last 03 months);
 - Fair remuneration (Respect of SMIG: attach DIPE or salary statement;
 - Respect of the principle of gender promotion: at least 20% of female workers when it is greater than five (05) people (attach the list of personnel with gender report;
 - Liability insurance covering the current financial year (attach insurance policy;

N.B: In case of a grouping, each of the companies must comply with the CSR standards listed above.

➤ Essential Qualification Criteria

No.	CRITERIA	EVALUATION	
		YES	NO
1	General Presentation of Offer <ul style="list-style-type: none">• Spiral binding, Layout, Orderly presentation of different parts of the document and Colour interlayer		
2	Funding Capacity <ul style="list-style-type: none">• Justify funding capacity at least equal to CFA F 35 000 000 (thirty-five million) established by a first class bank approved by the Ministry of Finance		
3	Compliance with HQSE Standards <ul style="list-style-type: none">• Justify personal protective equipment for workers		
4	Qualification and Experience of Key Personnel <ul style="list-style-type: none">• Project Manager:<ul style="list-style-type: none">- Senior Civil Engineering Technician (at least "A" Level +2) ;- Professional experience: at least three (03) years;• Site Supervisor:<ul style="list-style-type: none">- Civil Engineering Technician (at least "A" Level) ;- Professional Experience : at least two (02) years		
5	Site Knowledge: <ul style="list-style-type: none">• Certificate of site visit countersigned by the bidder and an official of the beneficiary structure. In any case, the bidder should have perfect knowledge of the work site		

	<ul style="list-style-type: none"> Site visit report specifying the characteristics of the site, difficulties encountered and recommendations if any . 		
6	Proof of Acceptance of the Terms and Conditions of the Contract: <ul style="list-style-type: none"> CCAP initialled on each page, dated, signed and stamped on the last page followed by "read and approved" : CCTP initialled on each page, dated, signed and stamped on the last page followed by "read and approved": 		
7	Planning and Deadline <ul style="list-style-type: none"> Detailed planning concerning the execution of the services corresponding to the deadline; Deadline ≤ five (05) months 		
8	Methodology and Organisation <ul style="list-style-type: none"> Methodological note Organisational approach to work teams. 		

14. Attribution

The contract shall be attributed to the candidate having:

- Presented the administrative offer in conformity;
- Validated at least 70% of the evaluation criteria;
- Presented the lowest financial bid.

15. Validity of Bids

Bidders shall remain committed to their offers within a period of ninety (90) days from the date set for the submission of their bids.

16. Site Visit

A visit to the site is planned by the Contracting Authority, after publication of this Invitation to Tender.

17. Further Information

Further Information may be obtained from the Contracts Unit, via the email address: servicedesmarches@cnpes.cm.

Copies :

- PCA/NSIF ;
- DECT ;
- P/CIPM-BEC ;
- DAG (SM)
- Notice Board.



Yaounde, 31 MAI 2022

(Handwritten signature in blue ink)

*Noël Alain Olivier Mbeubeu
Moondo Akame*

